


SLEEVES FOR WIRE AND CABLE MARKING



THERMAL TRANSFER PRINTABLE SLEEVES FOR WIRE & CABLE MARKING
 Brady's PermaSleeve™ heat shrinkable sleeves fit snugly around wires for maximum insulation protection and permanent identification. The full-circle insulating sleeves meet the rigid insulating material requirements and physical properties of MIL-DTL-23053/5 Class 1, MIL-M-81531, MIL-STD-202F, METHOD 215, and UL224. These fade resistant, smudge-proof sleeves can be used with Brady's range of thermal transfer printers.

COLOUR 3-TO-1 SHRINK RATIO TWO COLOURED PRINTABLE PERMASLEEVE™ WIRE MARKERS

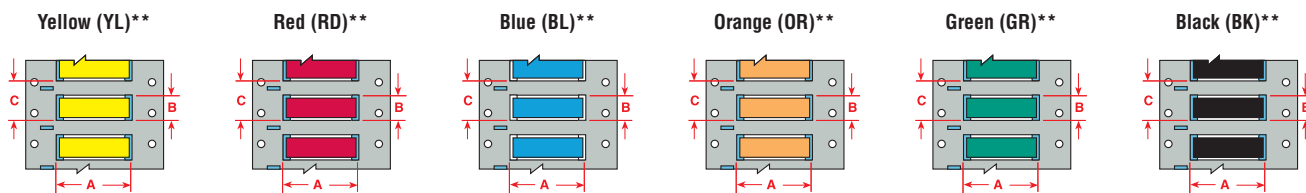

PERMASLEEVE™ Shrink to fit markers are available in a 3-to-1 shrink ratio to cover a wider range of wire diameters per sleeve size.

Coloured Polyolefin (B-342)


| Part No. | Recommended Reference | Markers Per Box | Range of Wire Diameter Min. – Max (mm) | Marker Width (mm) A | Marker Height (mm) B | Vertical Repeat (mm) C | Recommended Ribbon Series |
|------------------------------|-----------------------|-----------------|--|---------------------|----------------------|------------------------|---------------------------|
| 50.80 MM MARKER WIDTH | | | | | | | |
| 32501 | 3PS-094-2-YL | 2,500 | 0.58 – 2.03 | 50.80 | 4.60 | 12.70 | R-4300 |
| | 3PS-094-2**-S | 500 | 0.58 – 2.03 | 50.80 | 4.60 | 12.70 | R-4300 |
| 32502 | 3PS-125-2-YL | 2,500 | 1.17 – 2.79 | 50.80 | 6.00 | 12.70 | R-4300 |
| | 3PS-125-2**-S | 500 | 1.17 – 2.79 | 50.80 | 6.00 | 12.70 | R-4300 |
| 32503 | 3PS-187-2-YL | 2,500 | 1.57 – 3.81 | 50.80 | 8.50 | 15.88 | R-4300 |
| | 3PS-187-2**-S | 500 | 1.57 – 3.81 | 50.80 | 8.50 | 16.00 | R-4300 |
| 32504 | 3PS-250-2-YL | 2,500 | 2.39 – 5.46 | 50.80 | 11.15 | 19.05 | R-4300 |
| | 3PS-250-2**-S | 500 | 2.39 – 5.46 | 50.80 | 11.15 | 19.05 | R-4300 |
| 32505 | 3PS-375-2-YL | 1,000 | 3.18 – 8.13 | 50.80 | 16.40 | 25.40 | R-4300 |
| | 3PS-375-2**-S | 250 | 3.18 – 8.13 | 50.80 | 16.40 | 25.40 | R-4300 |
| 32506 | 3PS-500-2-YL | 500 | 4.75 – 11.43 | 50.80 | 21.60 | 31.75 | R-4300 |
| | 3PS-500-2**-S | 250 | 4.75 – 11.43 | 50.80 | 21.60 | 31.75 | R-4300 |

WIRE AND CABLE IDENTIFICATION

WIRE & CABLE MARKING LABELS



Self-Extinguishing White/Yellow Tedlar® Film (B-437)
General Purpose Nylon Cloth - Permanent (B-499)
White Vinyl Cloth - Repositionable (B-498)




| Part No. | Reference | Labels Per Roll | Labels per Row | Liner Width | Label Dimensions A (mm) B (mm) | Recommended Ribbon Series |
|---|---------------|-----------------|----------------|-------------|--------------------------------|---------------------------|
| MAXIMUM WIRE/CABLE DIAMETER 2 MM | | | | | | |
| 62679 | THT-5-498-10 | 10000 | 3 | 85.09 | 25.40 12.70 | R-6000 |
| MAXIMUM WIRE/CABLE DIAMETER 3 MM | | | | | | |
| 30542 | THT-68-499-10 | 10000 | 4 | 63.50 | 12.70 19.05 | R-4300 |
| 62681 | THT-68-498-10 | 10000 | 4 | 63.50 | 12.70 19.05 | R-6000 |
| 62683 | THT-88-498-5 | 5000 | 2 | 58.42 | 25.40 19.05 | R-6000 |
| MAXIMUM WIRE/CABLE DIAMETER 4 MM | | | | | | |
| 62686 | THT-91-498-5 | 5000 | 4 | 88.90 | 19.05 23.80 | R-6000 |
| MAXIMUM WIRE/CABLE DIAMETER 7 MM | | | | | | |
| 62685 | THT-90-498-5 | 5000 | 6 | 55.88 | 6.35 36.50 | R-6000 |
| 62682 | THT-87-498-5 | 5000 | 6 | 93.98 | 12.70 36.50 | R-6000 |
| 62690 | THT-95-498-5 | 5000 | 3 | 71.12 | 20.32 36.50 | R-6000 |
| 30543 | THT-69-499-3 | 3000 | 2 | 48.26 | 20.32 36.50 | R-6000 |
| 62684 | THT-89-498-5 | 5000 | 3 | 86.36 | 25.40 36.50 | R-6000 |
| CONTINUOUS MARKER | | | | | | |
| 30167 | THT-21-437-W | CONTINUOUS | 1 | 76.20 | 76.20 90 m | R-4300 |
| 30170 | THT-21-437-YL | CONTINUOUS | 1 | 76.20 | 76.20 90 m | R-4300 |

FIBRE OPTIC LABELS



Fibre Optic Labels (B-425) Flag

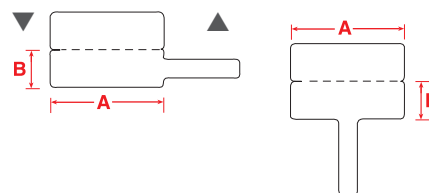

| Part No. | Diagram | Reference | Labels per Roll | Labels per Row | Liner Width | Label Dimensions A (mm) B (mm) | Applications | Recommended Ribbon Series |
|----------|---------|---------------|-----------------|----------------|-------------|--------------------------------|----------------------------|---------------------------|
| 217022 | ▲ | THTFP-01-8425 | 2500 | 1 | 56.00 | 30.00 10.00 | Pig-tail & single fibre ID | R-6000 |
| 217023 | ▼ | THTFT-01-8425 | 2500 | 2 | 69.00 | 30.00 10.00 | Pig-tail & single fibre ID | R-6000 |